

Additional pages may be attached to this report. Read them very carefully. This report may not be complete without the attachments. If an item is present in the property but is not inspected, the "NI" column will be checked and an explanation is necessary. Comments may be provided by the inspector whether or not an item is deemed in need of repair.

I=Inspected		NI=Not Inspected		NP=Not Present	R=Not Functioning or In Need of Repair	Inspection Item
I	NI	NP	R			

I. STRUCTURAL SYSTEMS

A. Foundations (If all crawl space areas are not inspected, provide an explanation.)

Type of foundation: Slab-on grade
 Method of inspection: Visual inspection of exterior

Comments (An opinion on performance is mandatory.):

The foundation is performing as intended. No significant problems were observed.
 Common minor cracks were observed in the foundation walls of the house. This implies that some structural movement of the building has occurred, as is typical of most houses.
 Add a soaker hose 18" from entire perimeter of slab to add moisture. Monitor moisture by digging a spot up near slab to see if it's damp.

B. Grading & Drainage

Comments:
 The driveway should be sealed where it meets the house at the garage.

C. Roof Covering (If the roof is inaccessible, report the method used to inspect.)

Type of roof covering: Fiberglass composition shingle
 Method of inspection: Walked on roof

Comments:

Minor repairs to the roofing on the addition are recommended. Damaged or missing roofing material should be repaired. All roof penetrations should be examined and sealed as necessary.
 We recommend to have your insurance provider to evaluate the roof for insurability.

D. Roof Structure & Attic (If the attic is inaccessible, report the method used to inspect.)

Method of inspection: Entered attic and performed a visual inspection
 Approximate depth of insulation: 8 inches

Comments: The department of energy recommends 18" of insulation in the attic of a home for maximum results.

E. Walls (Interior & Exterior)

Comments:

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

Some settling cracks at interior walls typical for a home built in 1963, some past repairs. Exterior walls have some settling cracks and weather proofing is needed at various locations.

F. Ceilings & Floors
Comments: Settling cracks at ceilings, linoleum floor covering torn in one location at kitchen.

G. Doors (Interior & Exterior)
Comments: Front door needs weather proofing.

H. Windows
Comments: Windows need weather proofing at exterior. 5 screens need replacing.

I. Fireplace/Chimney
Comments: Fire box has cracks in back.

J. Porches, Decks and Carports (Attached)
Comments:

II. ELECTRICAL SYSTEMS

A. Service Entrance and Panels
Comments: Two wire system we recommend a licensed professional electrician perform an entire evaluation.

B. Branch Circuits - Connected Devices and Fixtures (Report as in need of repair the lack of ground fault circuit protection where required.):
 Type of branch circuit wiring: Copper.
Comments: See II.ELECTRICAL SYSTEMS- A.

III. HEATING, VENTILATION AND AIR CONDITIONING SYSTEMS

A. Heating Equipment
Type And Energy Source:
 Type of heating system: Central Forced Air Furnace
 Energy source: Gas
Comments:

B. Cooling Equipment
Type And Energy Source:

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

Type of cooling system: Central Forced Air System

Energy source: Electricity

Comments:

C. Ducts and Vents

Comments:

IV. PLUMBING SYSTEM

A. Water Supply System and Fixtures

Comments: No back flow prevention at exterior faucets.

B. Drains, Wastes, Vents

Comments: Past repairs made under vanities.

C. Water Heating Equipment (Report as in need of repair those conditions specifically listed as recognized hazards by TREC rules.)

Energy Source:

Energy source: Gas

Comments:

D. Hydro-Therapy Equipment

Comments:

V. APPLIANCES

A. Dishwasher

Comments:

B. Food Waste Disposer

Comments:

C. Range Hood
Comments: Clean filter often.

D. Ranges/Ovens/Cooktops

Comments:

I	NI	NP	R	Inspection Item
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	E. Microwave Cooking Equipment <i>Comments:</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	F. Trash Compactor <i>Comments:</i>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	G. Bathroom Exhaust Fans and/or Heaters <i>Comments:</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	H. Whole House Vacuum Systems <i>Comments:</i>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	I. Garage Door Operators <i>Comments:</i> Set tension.
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	J. Door Bell and Chimes <i>Comments:</i>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	K. Dryer Vents <i>Comments:</i>
VI. OPTIONAL SYSTEMS				
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	A. Lawn Sprinklers <i>Comments:</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	B. Swimming Pools and Equipment <i>Comments:</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	C. Outbuildings <i>Comments:</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	D. Outdoor Cooking Equipment <i>Comments:</i>
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	E. Gas Lines <i>Comments:</i>

I	NI	NP	R	Inspection Item
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	F. Water Wells (A coliform analysis is recommended.) <i>Comments:</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	G. Septic Systems <i>Comments:</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	H. Security Systems <i>Comments:</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	I. Fire Protection Equipment <i>Comments:</i>

1. Add new smoke detectors to home or type smoke/carbon monoxide/house powered/battery back up.

Home is in fair condition with regular maintenance improvements can be made.
Develop a fire escape plan.

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

2. ADDENDUM: REPORT SUMMARY

The following is a synopsis of the potentially significant improvements that should be budgeted for over the short term. Other significant improvements, outside the scope of this inspection, may also be necessary. Please refer to the body of this report for further details on these and other recommendations.

For your convenience, the following conventions have been used in this summary addendum.

Major Concerns: *a system or component which is considered significantly deficient or is unsafe. Significant deficiencies need to be corrected and, except for some safety items, are likely to involve significant expense.*

Safety Issues: *denotes a condition that is unsafe and in need of prompt attention.*

Repair Items: *denotes a system or component which is missing or which needs corrective action to assure proper and reliable function.*

Improvement Items: *denotes improvements which are recommended but not required.*

Items To Monitor: *denotes a system or component needing further investigation and/or monitoring in order to determine if repairs are necessary.*

Deferred Cost Items: *denotes items that have reached or are reaching their normal life expectancy or show indications that they may require repair or replacement anytime during the next five (5) years.*

MAJOR CONCERNS

The inspection of the property listed above must be performed in compliance with the rules of the Texas Real Estate Commission (TREC).

SAFETY ISSUES

REPAIR ITEMS

IMPROVEMENT ITEMS

ITEMS TO MONITOR

Common minor cracks were observed in the foundation walls of the house in various locations. This implies that some structural movement of the building has occurred, as is typical of most houses.

DEFERRED COST ITEMS

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

ADDENDUM: MAINTENANCE ADVICE

Upon Taking Ownership

After taking possession of a new home, there are some maintenance and safety issues that should be addressed immediately. The following checklist should help you undertake these improvements:

- Change the locks on all exterior entrances, for improved security.
 - Check that all windows and doors are secure. Improve window hardware as necessary. Security rods can be added to sliding windows and doors. Consideration could also be given to a security system.
 - Install smoke detectors on each level of the home. Ensure that there is a smoke detector outside all sleeping areas. Replace batteries on any existing smoke detectors and test them. Make a note to replace batteries again in one year.
 - Create a plan of action in the event of a fire in your home. Ensure that there is an operable window or door in every room of the house. Consult with your local fire department regarding fire safety issues and what to do in the event of fire.
 - Examine driveways and walkways for trip hazards. Undertake repairs where necessary.
 - Examine the interior of the home for trip hazards. Loose or torn carpeting and flooring should be repaired.
 - Undertake improvements to all stairways, decks, porches and landings where there is a risk of falling or stumbling.
 - Review your home inspection report for any items that require immediate improvement or further investigation. Address these areas as required.
 - Install rain caps and vermin screens on all chimney flues, as necessary.
 - Investigate the location of the main shut-offs for the plumbing, heating and electrical systems. If you attended the home inspection, these items would have been pointed out to you.
-

Regular Maintenance

EVERY MONTH

- Check that fire extinguisher(s) are fully charged. Re-charge if necessary.
- Examine heating/cooling air filters and replace or clean as necessary.
- Inspect and clean humidifiers and electronic air cleaners.
- If the house has hot water heating, bleed radiator valves.
- Clean gutters and downspouts. Ensure that downspouts are secure, and that the discharge of the downspouts is appropriate. Remove debris from window wells.
- Carefully inspect the condition of shower enclosures. Repair or replace deteriorated grout and caulk. Ensure that water is not escaping the enclosure during showering. Check below all plumbing fixtures for evidence of leakage.
- Repair or replace leaking faucets or shower heads.
- Secure loose toilets, or repair flush mechanisms that become troublesome.

SPRING AND FALL

- Examine the roof for evidence of damage to roof coverings, flashings and chimneys.
- Look in the attic (if accessible) to ensure that roof vents are not obstructed. Check for evidence of leakage, condensation or vermin activity. Level out insulation if needed.
- Trim back tree branches and shrubs to ensure that they are not in contact with the house.
- Inspect the exterior walls and foundation for evidence of damage, cracking or movement. Watch for bird nests or other vermin or insect activity.

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

- Survey the basement and/or crawl space walls for evidence of moisture seepage.
- Look at overhead wires coming to the house. They should be secure and clear of trees or other obstructions.
- Ensure that the grade of the land around the house encourages water to flow away from the foundation.
- Inspect all driveways, walkways, decks, porches, and landscape components for evidence of deterioration, movement or safety hazards.
- Clean windows and test their operation. Improve caulking and weather-stripping as necessary. Watch for evidence of rot in wood window frames. Paint and repair window sills and frames as necessary.
- Test all ground fault circuit interrupter (GFCI) devices, as identified in the inspection report.
- Shut off isolating valves for exterior hose bibs in the fall, if below freezing temperatures are anticipated.
- Test the Temperature and Pressure Relief (TPR) Valve on water heaters.
- Inspect for evidence of wood boring insect activity. Eliminate any wood/soil contact around the perimeter of the home.
- Test the overhead garage door opener, to ensure that the auto-reverse mechanism is responding properly. Clean and lubricate hinges, rollers and tracks on overhead doors.
- Replace or clean exhaust hood filters.
- Clean, inspect and/or service all appliances as per the manufacturer's recommendations.

ANNUALLY

- Replace smoke detector batteries.
- Have the heating, cooling and water heater systems cleaned and serviced.
- Have chimneys inspected and cleaned. Ensure that rain caps and vermin screens are secure.
- Examine the electrical panels, wiring and electrical components for evidence of overheating. Ensure that all components are secure. Flip the breakers on and off to ensure that they are not sticky.
- If the house utilizes a well, check and service the pump and holding tank. Have the water quality tested. If the property has a septic system, have the tank inspected (and pumped as needed).
- If your home is in an area prone to wood destroying insects (termites, carpenter ants, etc.), have the home inspected by a licensed specialist. Preventative treatments may be recommended in some cases.

Prevention Is The Best Approach

Although we've heard it many times, nothing could be more true than the old cliché "an ounce of prevention is worth a pound of cure." Preventative maintenance is the best way to keep your house in great shape. It also reduces the risk of unexpected repairs and improves the odds of selling your house at fair market value, when the time comes.

Please feel free to contact our office should you have any questions regarding the operation or maintenance of your home. Enjoy your home!

ADDENDUM: RADON INFORMATION



EPA RADON RISK INFORMATION


Fifty-five percent of our exposure to natural sources of radiation usually comes from radon. Radon is a colorless, tasteless, and odorless gas that comes from the decay of uranium found in nearly all soils. Levels of radon vary throughout the country. Radon is found all over the United States and scientists estimate that nearly one out of every 15 homes in this country has radon levels above recommended action levels.

Radon usually moves from the ground up and migrates into homes and other buildings through cracks and other holes in their foundations. The buildings trap radon inside, where it accumulates and may become a health hazard if the building is not properly ventilated.

When you breathe air containing a large amount of radon, the radiation can damage your lungs and eventually cause lung cancer. Scientists believe that radon is the second leading cause of lung cancer in the United States. It is estimated that 7,000 to 30,000 Americans die each year from radon-induced lung cancer. Only smoking causes more lung cancer deaths and smokers exposed to radon are at higher risk than nonsmokers. Testing your home is the only way to know if you and your family are at risk from radon.

Testing for Radon

Should you have your home tested, use the chart below to compare your radon test results with the EPA guideline. The higher a home's radon level, the greater the health risk to you and your family.

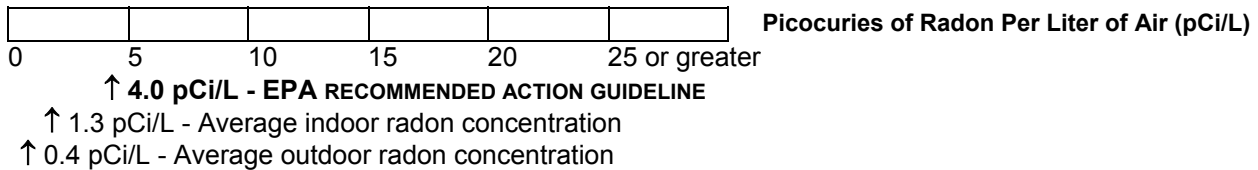

The U.S. Environmental Protection Agency (EPA) and the Surgeon General strongly recommend taking further action when the home's radon test results are 4.0 pCi/L or greater. The concentration of radon in the home is measured in picocuries per liter of air (pCi/L). Radon levels less than 4.0 pCi/L still pose some risk and in many cases may be reduced. If the radon level in your home is between 2.0 and 4.0 pCi/L, EPA recommends that you **consider** fixing your home. The national average indoor radon level is about 1.3 pCi/L. The higher a home's radon level, the greater the health risk to you and your family. Smokers and former smokers are at especially high risk. There are straightforward ways to fix a home's radon problem that are not too costly. Even homes with very high levels can be reduced to below 4.0 pCi/L. EPA recommends that you use an EPA or State-approved contractor trained to fix radon problems.

What do radon test results mean?

If your radon level is **below 4 pCi/L**, you do not need to take action.

If your radon level is **4 pCi/L or greater**, use the following charts to determine what your test results mean. Depending upon the type of test(s) you took, you will have to either test again or fix the home.

NOTE: All tests should meet EPA technical protocols.

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

Chart 1: Radon Test Conducted Outside Real Estate Transaction

Type of Test(s)	If Radon Level Is 4.0 pCi/L or Greater
Single Short-Term Test	Test Again*
Average of Short-Term Tests	Fix The Home
One Long-Term Test	Fix The Home

* If your first short term test is several times greater than 4.0 pCi/L - for example, about 10.0 pCi/L or higher - you should take a second short-term test immediately.

Chart 1: Radon Test Conducted During a Real Estate Transaction (Buying or Selling a Home)

Type of Test(s)	If Radon Level Is 4.0 pCi/L or Greater
Single Active Short-Term Test (this test requires a machine)	Fix The Home
Average of 2 Passive Short-Term Tests* (these tests do not require machines)	Fix The Home
One Long-Term Test	Fix The Home

* Use two passive short-term tests and average the results.

What should I do after testing?

If your radon level is 4.0 pCi/L or greater, you can call your State radon office to obtain more information, including a list of EPA or State-approved radon contractors who can fix or can help you develop a plan for fixing the radon problem. Reduction methods can be as simple as sealing cracks in floors and walls or as complex as installing systems that use pipes and fans to draw radon out of the building.

EPA has a National Radon Program to inform the public about radon risks, train radon mitigation contractors, provide grants for state radon programs, and develop standards for radon-resistant buildings. EPA works with health organizations, state radon programs, and other federal agencies to make the program as effective as possible.

For more information about radon, its risks and what you can do to protect yourself, call 1-800-SOS-RADON and request a free copy of EPA's *A Citizen's Guide to Radon*. You may also call the Radon Fix-It Line at 1-800-644-6999 between noon and 8pm Monday through Friday, EST/EDT, for information and assistance. This toll-free line is operated by Consumer Federation of America, a nonprofit consumer organization.

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

ADDENDUM: CARBON MONOXIDE INFORMATION

What is carbon monoxide (CO) and how is it produced in the home?

CO is a colorless, odorless, toxic gas. It is produced by the incomplete combustion of solid, liquid and gaseous fuels. Appliances fueled with gas, oil, kerosene, or wood may produce CO. If such appliances are not installed, maintained, and used properly, CO may accumulate to dangerous levels.

What are the symptoms of CO poisoning and why are these symptoms particularly dangerous?

Breathing CO causes symptoms such as headaches, dizziness, and weakness in healthy people. CO also causes sleepiness, nausea, vomiting, confusion and disorientation. At very high levels, it causes loss of consciousness and death.

This is particularly dangerous because CO effects often are not recognized. CO is odorless and some of the symptoms of CO poisoning are similar to the flu or other common illnesses.

Are some people more affected by exposure to CO than others?

CO exposures especially affect unborn babies, infants, and people with anemia or a history of heart disease. Breathing low levels of the chemical can cause fatigue and increase chest pain in people with chronic heart disease.

How many people die from CO poisoning each year?

In 1989, the most recent year for which statistics are available, there were about 220 deaths from CO poisoning associated with gas-fired appliances, about 30 CO deaths associated with solid-fueled appliances (including charcoal grills), and about 45 CO deaths associated with liquid-fueled heaters.

How many people are poisoned from CO each year?

Nearly 5,000 people in the United States are treated in hospital emergency rooms for CO poisoning; this number is believed to be an underestimate because many people with CO symptoms mistake the symptoms for the flu or are misdiagnosed and never get treated.

How can production of dangerous levels of CO be prevented?

Dangerous levels of CO can be prevented by proper appliance maintenance, installation, and use:

Maintenance:

- A qualified service technician should check your home's central and room heating appliances (including water heaters and gas dryers) annually. The technician should look at the electrical and mechanical components of appliances, such as thermostat controls and automatic safety devices.
- Chimneys and flues should be checked for blockages, corrosion, and loose connections.
- Individual appliances should be serviced regularly. Kerosene and gas space heaters (vented and unvented) should be cleaned and inspected to insure proper operation.
- CPSC recommends finding a reputable service company in the phone book or asking your utility company to suggest a qualified service technician.

Installation:

- Proper installation is critical to the safe operation of combustion appliances. All new appliances have installation instructions that should be followed exactly. Local building codes should be followed as well.
- Vented appliances should be vented properly, according to manufacturer's instructions.
- Adequate combustion air should be provided to assure complete combustion.
- All combustion appliances should be installed by professionals.

Appliance Use:

Follow manufacturer's directions for safe operation.

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

- Make sure the room where an unvented gas or kerosene space heater is used is well ventilated; doors leading to another room should be open to insure proper ventilation.
- Never use an unvented combustion heater overnight or in a room where you are sleeping.

Are there signs that might indicate improper appliance operation?

Yes, these are:

- Decreasing hot water supply
- Furnace unable to heat house or runs constantly
- Sooting, especially on appliances
- Unfamiliar or burning odor
- Increased condensation inside windows

Are there visible signs that might indicate a CO problem?

Yes, these are:

- Improper connections on vents and chimneys
- Visible rust or stains on vents and chimneys
- An appliance that makes unusual sounds or emits an unusual smell
- An appliance that keeps shutting off (Many new appliances have safety components attached that prevent operation if an unsafe condition exists. If an appliance stops operating, it may be because a safety device is preventing a dangerous condition. Therefore, don't try to operate an appliance that keeps shutting off; call a service person instead.)

Are there other ways to prevent CO poisoning?

Yes, these are:

- Never use a range or oven to heat the living areas of the home
- Never use a charcoal grill or hibachi in the home
- Never keep a car running in an attached garage

Can Carbon Monoxide be detected?

Yes, carbon monoxide can be detected with CO detectors that meet the requirements of Underwriters Laboratories (UL) standard 2034.

Since the toxic effect of CO is dependent upon both CO concentration and length of exposure, long-term exposure to a low concentration can produce effects similar to short term exposure to a high concentration.

Detectors should measure both high CO concentrations over short periods of time and low CO concentrations over long periods of time - the effects of CO can be cumulative over time. The detectors also sound an alarm before the level of CO in a person's blood would become crippling. CO detectors that meet the UL 2034 standard currently cost between \$35 and \$80.

Where should the detector be installed?

CO gases distribute evenly and fairly quickly throughout the house; therefore, a CO detector should be installed on the wall or ceiling in sleeping area/s but outside individual bedrooms to alert occupants who are sleeping.

Aren't there safety devices already on some appliances? And if so, why is a CO detector needed?

Vent safety shutoff systems have been required on furnaces and vented heaters since the late 1980s. They protect against blocked or disconnected vents or chimneys. Oxygen depletion sensors (ODS) have also been installed on unvented gas space heaters since the 1980s. ODS protect against the production of CO caused by insufficient oxygen for proper combustion. These devices (ODSs and vent safety shutoff systems) are not a substitute for regular professional servicing, and many older, potentially CO-producing appliances may not have such devices. Therefore, a CO detector is still important in any home as another line of defense.

Are there other CO detectors that are less expensive?

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

There are inexpensive cardboard or plastic detectors that change color and do not sound an alarm and have a limited useful life. They require the occupant to look at the device to determine if CO is present. CO concentrations can build up rapidly while occupants are asleep, and these devices would not sound an alarm to wake them.

For additional information, write to the U.S. Consumer Product Safety Commission, Washington, D.C., 20207, call the toll-free hotline at 1-800-638-2772, or visit the website <http://www.cpsc.gov>

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

ADDENDUM: LEAD BASED PAINT INFORMATION

Lead-based paint is hazardous to your health.

Lead-based paint is a major source of lead poisoning for children and can also affect adults. In children, lead poisoning can cause irreversible brain damage and can impair mental functioning. It can retard mental and physical development and reduce attention span. It can also retard fetal development even at extremely low levels of lead. In adults, it can cause irritability, poor muscle coordination, and nerve damage to the sense organs and nerves controlling the body. Lead poisoning may also cause problems with reproduction (such as a decreased sperm count). It may also increase blood pressure. Thus, young children, fetuses, infants, and adults with high blood pressure are the most vulnerable to the effects of lead.

Children should be screened for lead poisoning.

In communities where the houses are old and deteriorating, take advantage of available screening programs offered by local health departments and have children checked regularly to see if they are suffering from lead poisoning. Because the early symptoms of lead poisoning are easy to confuse with other illnesses, it is difficult to diagnose lead poisoning without medical testing. Early symptoms may include persistent tiredness, irritability, loss of appetite, stomach discomfort, reduced attention span, insomnia, and constipation. Failure to treat children in the early stages can cause long-term or permanent health damage.

The current blood lead level which defines lead poisoning is 10 micrograms of lead per deciliter of blood. However, since poisoning may occur at lower levels than previously thought, various federal agencies are considering whether this level should be lowered further so that lead poisoning prevention programs will have the latest information on testing children for lead poisoning.

Consumers can be exposed to lead from paint.

Eating paint chips is one way young children are exposed to lead. It is not the most common way that consumers, in general, are exposed to lead. Ingesting and inhaling lead dust that is created as lead-based paint "chalks," chips, or peels from deteriorated surfaces can expose consumers to lead. Walking on small paint chips found on the floor, or opening and closing a painted frame window, can also create lead dust. Other sources of lead include deposits that may be present in homes after years of use of leaded gasoline and from industrial sources like smelting. Consumers can also generate lead dust by sanding lead-based paint or by scraping or heating lead-based paint.

Lead dust can settle on floors, walls, and furniture. Under these conditions, children can ingest lead dust from hand-to-mouth contact or in food. Settled lead dust can re-enter the air through cleaning, such as sweeping or vacuuming, or by movement of people throughout the house.

Older homes may contain lead based paint.

Lead was used as a pigment and drying agent in "alkyd" oil based paint. "Latex" water based paints generally have not contained lead. About two-thirds of the homes built before 1940 and one-half of the homes built from 1940 to 1960 contain heavily-leaded paint. Some homes built after 1960 also contain heavily-leaded paint. It may be on any interior or exterior surface, particularly on woodwork, doors, and windows. In 1978, the U.S. Consumer Product Safety Commission lowered the legal maximum lead content in most kinds of paint to 0.06% (a trace amount). Consider having the paint in homes constructed before the 1980s tested for lead before renovating or if the paint or underlying surface is deteriorating. This is particularly important if infants, children, or pregnant women are present.

Consumers can have paint tested for lead.

There are do-it-yourself kits available. However, the U.S. Consumer Product Safety Commission has not evaluated any of these kits. One home test kit uses sodium sulfide solution. This procedure requires you to place a drop of sodium sulfide solution on a paint chip. The paint chip slowly turns darker if lead is present. There are problems with this test, however. Other metals may cause false positive results, and resins in the paint may prevent the sulfide from causing the paint chip

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

to change color. Thus, the presence of lead may not be correctly indicated. In addition the darkening may be detected only on very light-colored paint.

Another in-home test requires a trained professional who can operate the equipment safely. This test uses X-ray fluorescence to determine if the paint contains lead. Although the test can be done in your home, it should be done only by professionals trained by the equipment manufacturer or who have passed a state or local government training course, since the equipment contains radioactive materials. In addition, in some tests, the method has not been reliable.

Consumers may choose to have a testing laboratory test a paint sample for lead. Lab testing is considered more reliable than other methods. Lab tests may cost from \$20 to \$50 per sample. To have the lab test for lead paint, consumers may:

- Get sample containers from the lab or use re-sealable plastic bags. Label the containers or bags with the consumer's name and the location in the house from which each paint sample was taken. Several samples should be taken from each affected room (see HUD Guidelines discussed below).
- Use a sharp knife to cut through the edges of the sample paint. The lab should tell you the size of the sample needed. It will probably be about 2 inches by 2 inches.
- Lift off the paint with a clean putty knife and put it into the container. Be sure to take a sample of all layers of paint, since only the lower layers may contain lead. Do not include any of the underlying wood, plaster, metal, and brick.
- Wipe the surface and any paint dust with a wet cloth or paper towel and discard the cloth or towel.

The U.S. Department of Housing and Urban Development (HUD) recommends that action to reduce exposure should be taken when the lead in paint is greater than 0.5% by lab testing or greater than 1.0 milligrams per square centimeter by X-ray fluorescence. Action is especially important when paint is deteriorating or when infants, children, or pregnant women are present. Consumers can reduce exposure to lead-based paint.

If you have lead-based paint, you should take steps to reduce your exposure to lead.

You can:

1. Have the painted item replaced.

You can replace a door or other easily removed item if you can do it without creating lead dust. Items that are difficult to remove should be replaced by professionals who will control and contain lead dust.

2. Cover the lead-based paint.

You can spray the surface with a sealant or cover it with gypsum wallboard. However, painting over lead-based paint with non-lead paint is not a long-term solution. Even though the lead-based paint may be covered by non-lead paint, the lead-based paint may continue to loosen from the surface below and create lead dust. The new paint may also partially mix with the lead-based paint, and lead dust will be released when the new paint begins to deteriorate.

3. Have the lead-based paint removed.

Have professionals trained in removing lead-based paint do this work. Each of the paint-removal methods (sandpaper, scrapers, chemicals, sandblasters, and torches or heat guns) can produce lead fumes or dust. Fumes or dust can become airborne and be inhaled or ingested. Wet methods help reduce the amount of lead dust. Removing moldings, trim, window sills, and other painted surfaces for professional paint stripping outside the home may also create dust. Be sure the professionals contain the lead dust. Wet-wipe all surfaces to remove any dust or paint chips. Wet-clean the area before re-entry.

You can remove a small amount of lead-based paint if you can avoid creating any dust. Make sure the surface is less than about one square foot (such as a window sill). Any job larger than about one square foot should be done by professionals. Make sure you can use a wet method (such as a liquid paint stripper).

4. Reduce lead dust exposure.

You can periodically wet mop and wipe surfaces and floors with a high phosphorous (at least 5%) cleaning solution. Wear waterproof gloves to prevent skin irritation. Avoid activities that will disturb or damage lead based paint and create dust. This is a preventive measure and is not an alternative to replacement or removal.

I	NI	NP	R	Inspection Item
---	----	----	---	-----------------

Contact your state and local health departments lead poisoning prevention programs and housing authorities for information about testing labs and contractors who can safely remove lead-based paint. The U.S. Department of Housing and Urban Development (HUD) prepared guidelines for removing lead-based paint. Ask contractors about their qualifications, experience removing lead-based paint, and plans to follow these guidelines.